




## Product Data Sheet

### Painter's Tape *SELECT*

#### Product Description:

Painter's tape SELECT works well on drywall, glass, hardwood floors, wood trim, and a variety of other surfaces. The most typical use is paint and window masking. Application of the product and preparation and nature of the substrate are factors which will affect the product performance. The end user must determine its suitability for use.

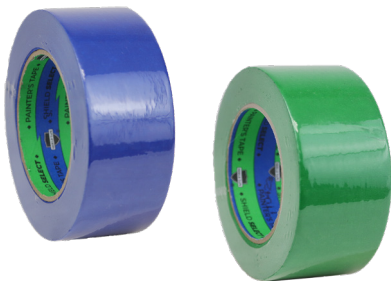

#### Item ID Numbers

**Here:** BPTS5524L,  
BPTS5536L, BPTS5548L,  
BPTS5572L, BPTS5524G,  
BPT5548G

**Wrap-Tite, Inc.**  
6200 Cochran Rd.  
Solon, Ohio 44139  
**Toll Free:** 888-WRAP-TITE  
**Fax:** 440-349-5432  
www.wraptite.com -  
info@wraptite.com

<b>Adhesion to Backing:</b>	10.23 oz/in (GB/T 2792-2014)
<b>Tack Level:</b>	High Tack (GB/T 4852-2002)
<b>Color:</b>	Blue(L) and Green(G)
<b>Elongation (% At Break)</b>	9-10% (GB/T 30776-2014)
<b>Tensile Strength</b>	19 lb/sq. in (GB/T 30776-2014)
<b>Adhesion to Steel</b>	21-22 on/in
<b>Total Thickness:</b>	5.51 Mil
<b>Temperature Range:</b>	194° F
<b>UV Testing</b>	10-14 days
<b>Country of Origin</b>	Vietnam

We believe the statements and information contained herein are accurate but are to be used only as general guidelines and are not warrants or guarantees because of the variety of possible uses. THERE IS NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. THE BUYER MUST TEST THE SUITABILITY FOR EACH INTENDED APPLICATION BEFORE USING. WRAPTITE WILL NOT BE LIABLE FOR DAMAGES IN EXCESS OF THE PURCHASE PRICE OF ITS PRODUCTS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.